


Table Of Contents


The Scout Telephone for Supervisors	2
Description of the Display (Idle Display)	3
Signing in to <i>QuickQ</i>	3
Changing the Mode of Operation	4
Recording Announcements	4
Viewing Current Reports	6
Monitoring Agents.....	7
Responding to Help	8
Receiving ACD Calls.....	9
Placing Outgoing Calls	9
Assigning an Account Code.....	9
Things to Remember	9
Log-in Procedure.....	10
Responding to Request for Help	10
Supervisor's Menu	11

The Scout Telephone For Supervisors


- *QuickQ* versions using software release 3.0 (or later) allow the use of up to nine Scout digital wireless telephones. Using these telephones provides users with maximum freedom to move about within the call center.
- The F1 button should be programmed as the OAI button (labeled ACD) on your Scout telephone. This button enables you to sign into *QuickQ*. Buttons F2, F3, and F4 should be programmed to function the same as the three interactive buttons on the proprietary 12-button and 24-button telephones while *QuickQ* is active.
- All displays shown in this guide are as seen on the 20-character (10 characters x two lines) Scout display.

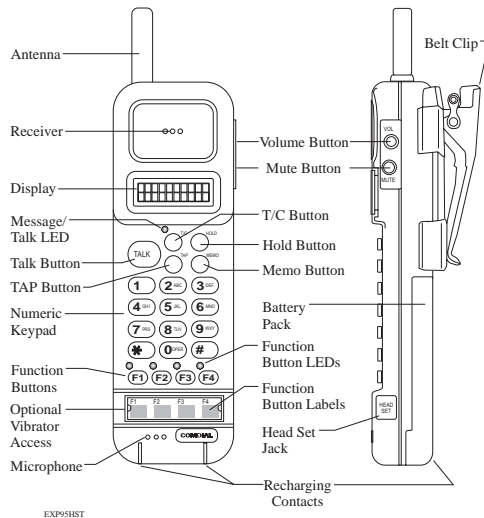

Supervisor's Menu

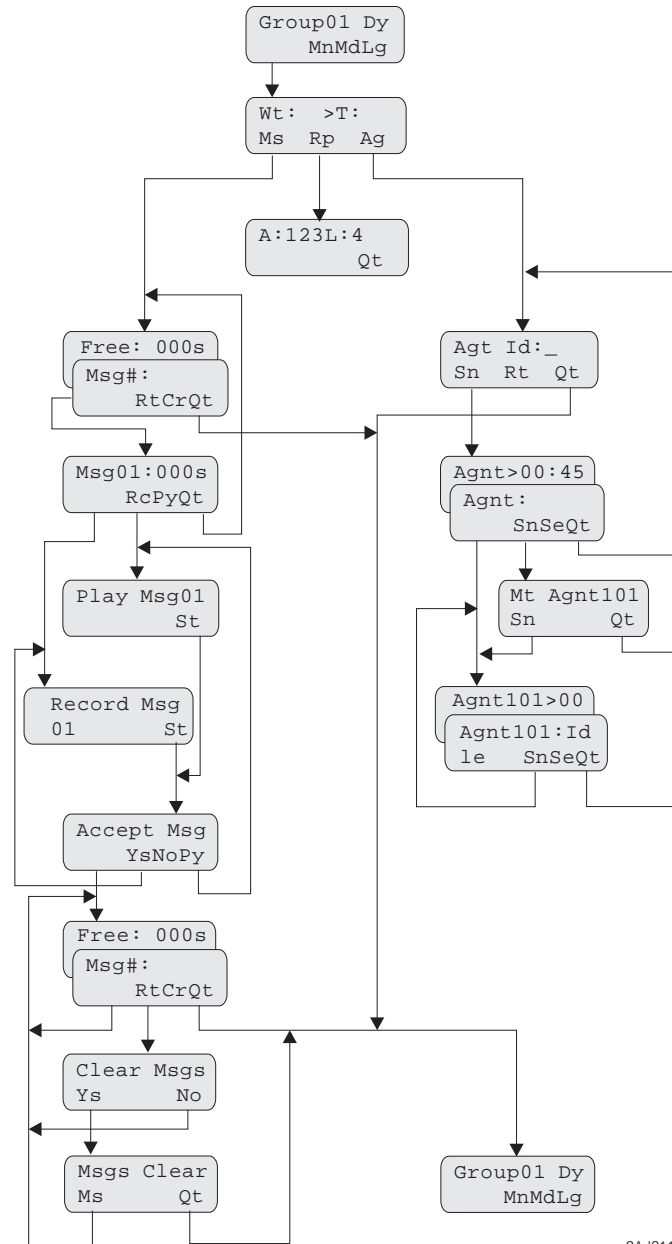


Log-in Procedure

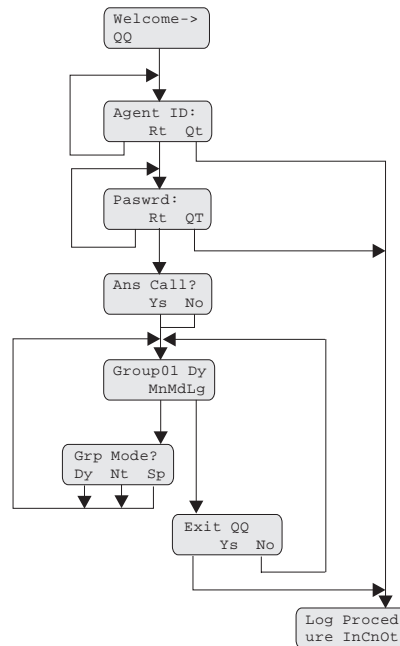


CAJS113

Responding To Request For Help

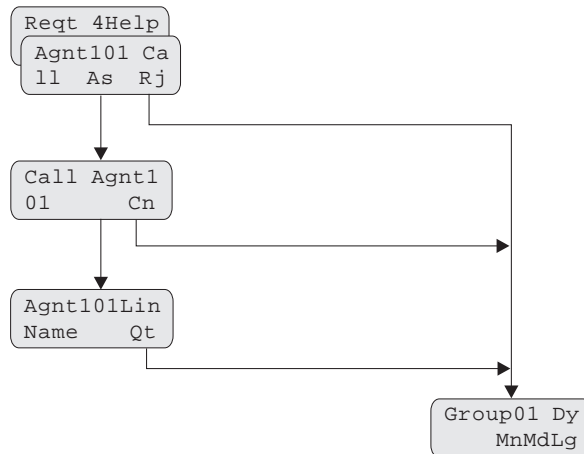

CAJS114

Description Of The Display (Idle Display)

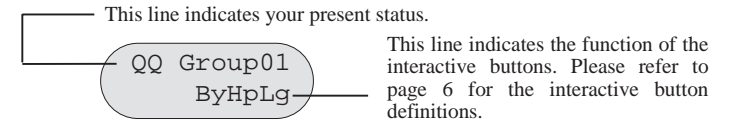

Signing In To QuickQ

- Press the ACD (F1) button (OAI button).



After 2 seconds



- Use the keypad to enter your ID number. Press the Rt (retry) Interactive button if you enter an incorrect digit.

Valid ID




- Enter your password digits.

Valid password



- IF you want to answer ACD calls for your group, press the Ys (yes) Interactive button. ACD calls will be sent to you according to the agent availability and your priority level. If you do not want to be part of the answering group, press the No Interactive button.

This display is the idle display. If you are accepting ACD calls, they will **only** be sent to you while you are in the idle state.



- The above display indicates you are now signed into Group 1, and the group is in Dy (day) mode. To access the supervisor menu, press the Mn (menu) Interactive button. To change the mode of operation, press the Md (mode) Interactive button. To log out of *QuickQ*, press the Lg (log) Interactive button.

Changing The Mode Of Operation

- The idle display indicates the current mode of operation for the group.

```
Group01 Dy
      MnMdLg
```

The display indicates that group 1 is in day mode.

- To change the mode of operation manually for the group, press the Md (mode) Interactive button.

```
Grp Mode?
Dy Nt Sp
```

Three modes of operation are available; day, night and special.

- Press the Interactive button that corresponds to the desired mode of operation for your group as follows:

Dy (day): day announcements and call routing
 Nt (night): night announcement and disconnect
 Sp (special): special announcement and disconnect

Recording Announcements

- To record the announcements for your group, press the Mn (menu) Interactive button from the idle display.

```
Wt :      >T
Ms Rp Ag
```

This is the supervisor's menu display. All supervisor features are accessible through this display.

- Press the Ms (msg) Interactive button. The system will then call the digital voice announcer to access a voice port. Once a voice port is available, the following display is shown.

```
Free: 000s
RtCrQt
```

Indicates how much time is currently available for recording.

After 2 seconds

```
Msg#:
RtCrQt
```

Clear all messages or choose a specific message to record.

Receiving ACD Calls

- When you sign into the *QuickQ*, you can choose to accept ACD calls, but you cannot transfer a call into any ACD queue. However, you can transfer a call to any individual agent using the agent's intercom number. Please refer to the *Agent's User Guide* for details on receiving ACD calls.

Placing Outgoing Calls

- Select an outgoing line and dial the number. Please refer to the *Agent's User Guide* for details on placing outgoing calls.

Assigning An Account Code

- Account codes can be assigned to both incoming and outgoing calls. Multiple account codes can be given to individual calls. Please refer to the *Agent's User Guide* for details on assigning account codes.

Things To Remember


- If your display is blank, your telephone is either not logged-in, or the *QuickQ* is suspended. Press the *QuickQ* button to resume.
- The agent cannot log out if he or she is the last one in the group to answer. To log out after answering last, the agent must change the mode of operation to Night or Special and then log out.
- If you choose to accept ACD calls, be sure to log out or press the menu Interactive button to make your station busy when you leave your desk or when you are unable to answer ACD calls.

Responding To Help

Note: You must be in the Idle state (see display below) to be available to your agents for help.



- When an agent in your group requests help, your telephone will beep and this display will appear.

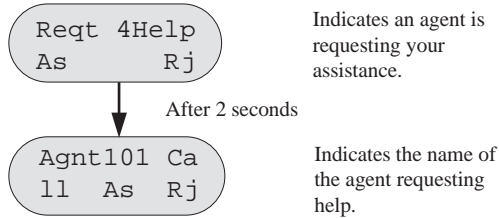

- To reject the call for help, press the Rj (reject) Interactive button. The agent will be notified that you are unavailable.
- To answer, press the As (answer) Interactive button. The system will then call the agent.



- When the agent answers, you will either be connected to the agent and the caller, or just the agent (at the agent's discretion). The agent has the option to transfer the call to you, or disconnect you from the conversation. While connected to this call, your display will be as follows.



- To disconnect from the conversation, press Qt (quit).

- Enter the desired message number.



- When you are ready to record the announcement, lift the handset and press the Rc (record) Interactive button. Wait for the tone, and then start speaking into the handset. Press the St (stop) Interactive button when you are finished recording.



- To accept the message recorded, press Ys (yes). You will then return to the Time free display to allow you to continue recording additional announcements. If you do not want this message, press No. The system will immediately begin recording again.
- If you want to review the recorded announcement, press the Py (play) Interactive button.



- Once you press St (stop), you will be prompted to accept, reject or review the message again. Press the appropriate Interactive button.
- To return to the Idle display, press Qt (quit).
- Refrain from recording messages during peak calling periods, since while you are recording you are using one of the voice ports. This could result in longer than usual ring delays for callers.

Viewing Current Reports

- The supervisor can view current reports on answered and abandoned call statistics. These statistics are based on line activity for the group.

Note: If your group does not have lines assigned to it, this report will show zeros.

- From the idle display, press Mn (menu).

```
Wt :      >T
      MsRpAg
```

This display is the supervisor's menu display.

- Press the Rp (report) Interactive button.

```
A : 123  L : 4
                Qt
```

Indicates the cumulative answered and lost calls on the group's lines

- To return to the idle display, press Qt (quit).

Scout Interactive Button Definitions

Scout Display	Standard Display	Scout Display	Standard Display
Ab	ABORT	Ok	OK
Ac	ACC (account)	Ot	Out
Ag	AGENT	Py	PLAY
Al	ALL	Qt	QUIT
As	ANSWER	Rd	READY
By	BUSY	Rc	RECORD
Cn	CANCEL	Rj	REJECT
Cr	CLEAR	Rs	RELEASE
Cf	CONF	Rp	REPORT
Dy	DAY	Rt	RETRY
Ex	EXIT	Rn	RETURN
Hp	HELP	Sn	SCAN
Hd	HOLD	Se	SELECT
In	IN	Sk	SKIP
Lg	LOG	Sp	SPEC'L (special)
Lg	Logout	St	STOP
Mn	MENU	Tr	TRANS (transfer)
Md	MODE	V c	VOICE
Ms	MSG (message)	Wp	WRAPUP
Nt	NIGHT	Ys	YES
No	NO		

Monitoring Agents

- The group supervisor can monitor agent activity and silently monitor conversations. From the supervisor menu, press the Ag (agent) Interactive button.

```
Agt Id:
      SnRtQt
```

Allows you to select the specific agent you want, or to have the system select an agent.

- Enter the ID number of the agent you want to monitor, or press Sn (scan), and the system will select an agent for you.

```
Agnt101>00
:00 SnSeQt
```

Indicates the selected agent and the time the agent has been in his or her current state.

After 2 seconds

```
Agnt101:
      Sn  Se  Qt
```

Shows the current state of the selected agent. This agent is on an incoming call.

- Press the Sn (scan) Interactive button to view another agent, or press the Qt (quit) Interactive button to enter another agent's ID.
- To silently monitor an agent's conversation, press the Se (select) Interactive button. You will then be able to listen to the conversation without the agent or the caller hearing you.

```
Mt Agnt101
      Sn      Qt
```

Indicates which agent's conversation you are monitoring.

Press Sn (scan) to have the system select another agent, or press Qt (quit) to enter another agent's ID. Press Qt (quit) twice to return to the idle display.

This manual has been developed by Comdial Corporation (the "Company") and is intended for the use of its customers and service personnel. The information in this manual is subject to change without notice. While every effort has been made to eliminate errors, the Company disclaims liability for any difficulties arising from the interpretation of the information contained herein.

The information contained herein does not purport to cover all details or variations in equipment or to provide for every possible contingency to be met in connection with installation, operation, or maintenance. Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's purposes contact, Comdial, Inside Sales Department, P.O. Box 7266, Charlottesville, Virginia 22906.

COMDIAL®
Charlottesville, Virginia 22901-2829
World Wide Web: <http://www.comdial.com/>

Printed in U.S.A.

GCA70-345.01
04/97

QuickQ
DXP

**Supervisor's
User Guide
for the
Scout Telephone**

COMDIAL®